



Electric Boilerless Tabletop Combi
with One Touch Control

BLCT-6E-MCD

The optimal choice when size matters. The BLCT-6E-MCD mini combi is a completely unique oven size on the market. With a width of only 20.2" it can fit into even the smallest kitchens.

It is small but effective. Despite its small size, the BLCT-6E-MCD mini combi has the same features as a large combi oven. In other words, it has all the features you need in a smaller kitchen.

Consistent Results - the Blodgett One Touch control lets you use pre-programmed recipes to ensure consistent, results every time.



CAPACITY

- ❑ 5 each 13" x 18" sheet pans




STANDARD FEATURES

- 2 year parts and labor standard McDonald's warranty
- Bright halogen lights for superior visibility
- Left door hinge, field reversible
- Start-up inspection service by factory authorized service agent.

www.blodgett.com

42 Allen Martin Drive, Essex Junction, VT 05452 • Phone: (802) 658-6600 • Fax: (802) 864-0183

P/N 61828 Rev S (3/25)

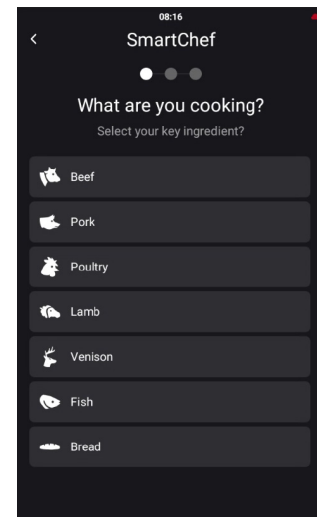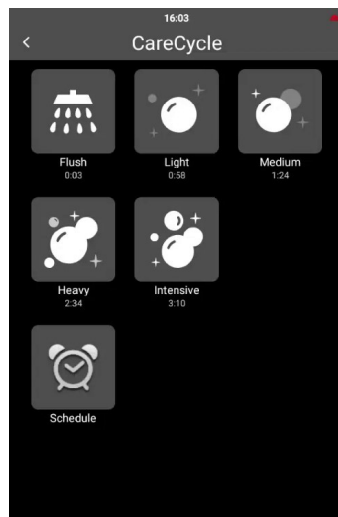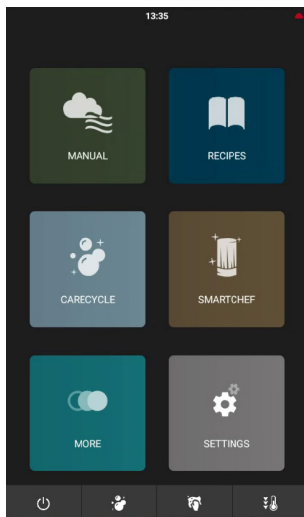

OVEN OPERATION

- Injection steam system - water is precisely injected onto the heating elements, the resulting steam is distributed in the oven chamber by the fan wheel.
- Easy to use touchscreen control stores up to 1500 recipes with up to 15 steps each
- Multiple cooking modes include hot air, CombiSpeed, steaming, low-temperature steaming, forced steaming, proofing, preheating
- Manual or automatic cooling
- Automatic humidity pulsing
- Rack timing for setting individual timers for each rack
- Reversible 9 speed fan for optimum baking and roasting results
- USB port for data and recipe transfer
- HACCP recording and documentation
- Automated CombiWash system features very low water and detergent consumption and no contact with chemicals. No proprietary chemicals required, see owner's manual for detergent guidelines.

CONSTRUCTION

- 430 stainless steel sides, top and back
- 304 stainless steel bottom, door and interior
- Dual pane tempered viewing window with hinged inner glass for easy cleaning
- 1.57" (40mm) fixed drain in the bottom center of cavity
- Drip tray mounted below the door reduces the risk of wet, slippery floors
- CTD Cool Touch Door
- Oven door with ventilated heat-reflecting glass
- Left hinge door is field convertible to the right side
- Two step safety door latch. The first step stops the fan.

SHORT FORM SPECIFICATIONS: Provide Blodgett model BLCT-6E-MCD boilerless mini combination-oven/steamer. The BLCT-6E-MCD has a 2 piece rack system that holds five 12" x 20" x 2" deep or four 12" x 20" x 2-1/2" deep North American hotel pans.

Unit has a stainless steel exterior and interior. Oven door has a dual pane tempered viewing window with hinged inner glass for easy cleaning. Includes a detachable hand shower and separate water lines. Unit shall have bright halogen lights for superior visibility. Oven has two separate water lines for cooking and quench. You may choose to cook with pressureless steam, hot air, or combination of steam and hot air.

The One Touch control stores 1500 recipes with 15 stages each, in addition to pre-programmed recipes. Multiple modes include hot air, combi, steaming, low-temperature steaming, forced steaming, proofing, cooling, and preheating. The control allows for timed steam injection or instant steam on demand at any point in the cook cycle. Rack timing provides individual timers for each rack. HACCP quality control, USB connectivity and automatic service diagnosis are included. Programmable vent release allows for automatic venting if desired. The reversible 9 speed fan provides optimum baking and roasting results. The automated combi wash system features very low water and detergent consumption and no contact with chemicals.

Includes one-year parts and labor warranty. Provide start-up inspection service by a factory authorized service agent. Provide options and accessories as indicated.

NOTE: The company reserves the right to make substitutions of components without prior notice.

POWER SUPPLY

VOLTAGE	KW	PHASE	AMPERAGE
208 VAC	6.9	3 Ph	20 amp

Available in 50 or 60 Hz (specify)

Units are equipped with standard McDonald's 90° Pin and Sleeve plug from factory.

This appliance uses a variable frequency drive, which can be known to product high frequency electrical noise. In some cases units must be hard wired. This avoids false positives on ground fault devices susceptible to errors from electrical noise. All installations must comply with local and national codes.

WATER SUPPLY

Good quality water feed is the responsibility of the owner. Water quality must be within the following general guidelines.

TDS: 40-125 ppm	pH: 7.0-8.5
Hardness: 35-180 ppm	Silica: <13 ppm
Chloramine: <0.2 ppm	Chlorine: <0.2 ppm
Chlorides: <25 ppm	

The best defense against poor water quality is a water treatment system designed to meet your water quality conditions. Blodgett offers optional water treatment systems.

Pressure

- 40 (min)-50 (max) PSI

Connections

- 1.57" (40mm) drain connection - max. drain temperature 140°F (60°C)
- 3/4" garden hose cold water

DRAIN








The drain piping must consist of temperature resistant material, greater than 160°F, and be of adequate diameter not to cause flow restriction. Improper materials may deform and cause restrictions, thus affecting performance.



Appliance is to be installed with backflow protection in accordance with federal, state or local codes.





DIMENSIONS ARE IN INCHES (MM)

LEGEND

-  DETERGENT
-  RINSE AID
-  FILTERED WATER
-  UNFILTERED WATER
-  DRAIN
-  DRAIN OVERFLOW
-  ELECTRICAL

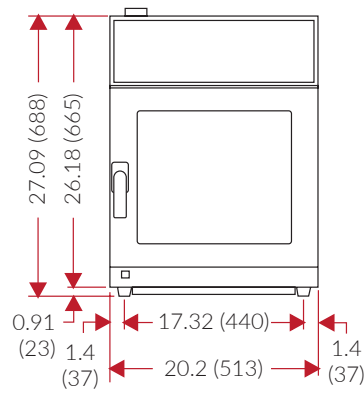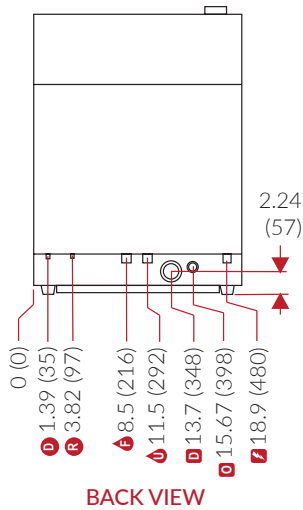

FRONT VIEW

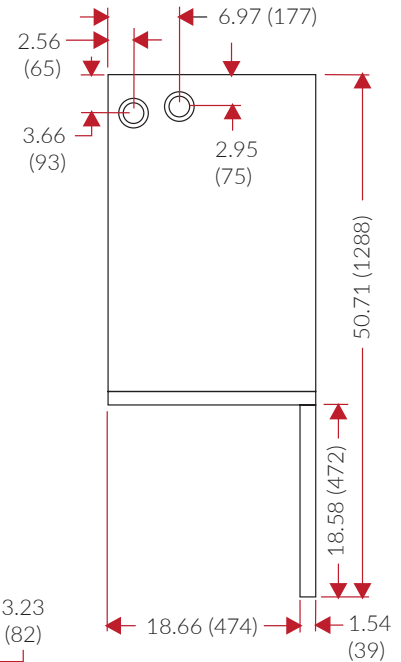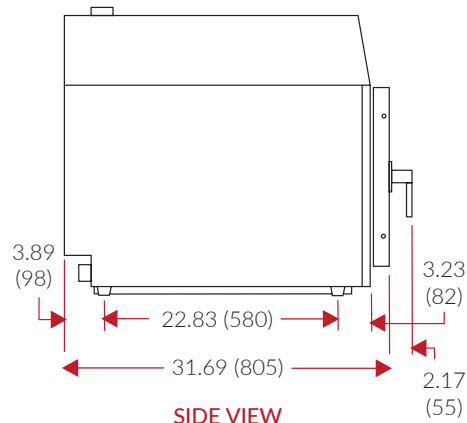

SHIPPING

WEIGHT

188 lbs (85 kg)

CRATE SIZE (L x W x H)

21.5" x 37" x 36"
(546 mm x 940 mm x 914 mm)

DIMENSIONS & CLEARANCES

FLOOR SPACE

32.13" x 20.2" (816 x 513mm)

UNIT HEIGHT

30.18" (718mm)

MINIMUM ENTRY CLEARANCES

Uncrated 20.2" (513mm)

Crated 21.5" (546mm)

OVEN INSTALLATION CLEARANCE REQUIREMENTS

Kitchen Environment	Low temp.	High temp.*
Left Side & Back	2" (50mm)	2" (50mm)
Right (control) Side	2" (50mm)	16" (400mm)

* includes heat sources (fryers, hot plates, etc) placed on the control side of the combi

For servicing, Blodgett recommends maintaining at least 16" (400 mm) between the control side and walls or non moveable equipment.

